



BAKER MOTORS (Rochdale) LTD.,  
249/251 OLDHAM ROAD,  
ROCHDALE, W

**VOLVO** 265



You sit on real leather in the 265 GL. There's plenty of room for five as well as 42 cu.ft. of luggage.



The instrumentation includes a comprehensive system of warning and reminder lights.

	265 DL	265 GL
<b>Engine</b>		
Designation	B27A	B27A
Configuration	V6	V6
Displacement cm <sup>3</sup>	2664	2664
Bore x stroke, mm	88.0 x 73.0	88.0 x 73.0
Max output hp at r/m DIN	125/5250	125/5250
Max output kW at r/s DIN	92/88	92/88
Max torque kpm r/m DIN	20.0/3500	20.0/3500
Max torque Nm at r/s DIN	196/58	196/58
Compression ratio	8.7:1	8.7:1
<b>Equipment<sup>1)</sup></b>		
Headlight washers/wipers	—	Yes
Instruments	Clock	Clock. Tachometer
Steering wheel diameter/type	400 mm	400 mm/integral foam clad
Tinted glazing	—	Yes
Vanity mirror	—	In glovebox
Upholstery	Cloth	Leather
Electrically heated driving seat	—	Yes
Oddments storage	In front doors	In front doors and on front seat backrests

<sup>1)</sup> The equipment listed in the above table is additional to the standard equipment specified in the following.


**Engine**  
Water-cooled, V6 engine with single cross-draught carburettor. Engine block and cylinder heads of aluminium alloy. Overhead camshafts. Contactless, transistorised ignition system. Economy grade petrol.

**Cooling system**  
Sealed and frost-proofed. Volume 2.4 Imp. galls./10.9 litres.

**Electrical system**  
12V/70Ah battery. 55A alternator.

**Fuel tank**  
Safety location beside rear axle, below rear underbody. Capacity approx. 13.2 Imp. galls./60 litres.

**Transmission**  
Diaphragm spring clutch. Fully synchronised, four-speed, manual gearbox with overdrive operating

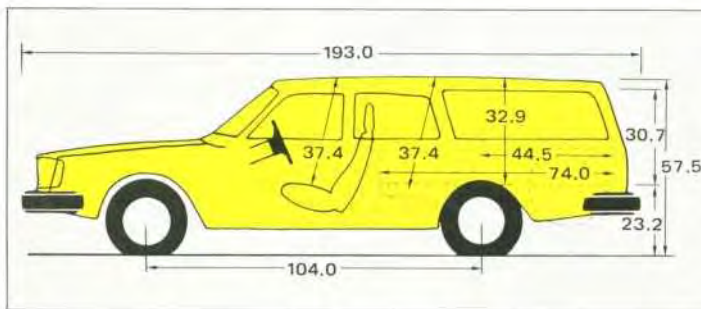

on 4th gear. Automatic transmission is optional on the 265 DL and standard on the Volvo 265 G L.

**Steering gear**  
Rack and pinion. Safety steering column, two-part, telescopic. Steering ratio 17.1:1. Power assisted. 3.5 turns from lock to lock.

**Suspension**  
Front: spring strut type with stabiliser. Rear: live, carried in rubber-mounted control arms and torque rods, transverse location by track rod.

**Wheels and tyres**  
Steel braced, radial ply tyres, dimension 1855R 14 on 5.5J-14" rims.

**Braking system**  
Power assisted, all-disc, dual circuit, triangle-split system. Each circuit operates simultaneously on both front wheels and one each of the rear wheels. Relief valves prevent premature rear wheel lock-up in emergency situations. Master cylinder of stepped-bore type. Rust-resistant brake pipes of copper and nickel alloy throughout. Handbrake operates on separate rear wheel drums.

**Instrumentation**  
Padded safety fascia. Rheostat-controlled instrument lighting, selected controls have concealed lighting. Six-figure mileometer with tripmeter. Fuel gauge. Coolant temperature gauge. Warning lamps for: charging, oil pressure, turn indicators, main beam, handbrake application, brake circuit failure and bulb integrity sensor. Illuminated glovebox. Combined steering and ignition lock. Quartz clock. Centre console: switches for electrically heated rear window and four-way hazard warning lights. Also; controls for heating and ventilation system, "fasten seat belts" reminder, cigar lighter and ashtray. Radio compartment.

**Other standard equipment**  
Combined stalk for turn indicators, main and dipped beam with head-

light flasher. Combined stalk for two-speed windscreen wipers and electric windscreen washers. Rectangular halogen headlights with separate reflectors for main and dipped beams. Automatic day running lights. Automatic reversing lights. Four inertia reel seat belts with static lap belt for centre rear passenger. Rear "fasten seat belts" reminder. High impact type laminated windscreen. Front head-restraints, Driving seat height adjustment by levers. Adjustable lumbar support. Child-proof locks in both rear side doors and tailgate. Impact absorbing bumpers. Door mirror on driver's side. Moulded glassfibre roof lining. Engine compartment lighting and courtesy light beside tailgate. Electrically heated tailgate window also has wiper and washer. Mud-flaps all round. Towing points front and rear.

Exterior dimensions	(in/mm)
Overall length	193/4898
Overall width	67.2/1707
Track:	
Front	56.3/1430
Rear	53.5/1360
Turning circle between kerbs ...	32 ft. 2 in/9.8 m

Cargo area dimensions	
Volume, rear seat:	
in use approx ...	42 cu.ft./1.2 m <sup>3</sup>
folded approx ...	67 cu.ft./1.9 m <sup>3</sup>
Volume, concealed cavity approx	2.3 cu.ft./65 dm <sup>3</sup>
Tailgate opening max. width	457 in/1160 mm

Weights	(l b/kg)
Kerb weight approx...	3164/1435
Gross weight approx...	4299/1950
Trailer weight	3307/1500

**Warranty**  
Twelve-month warranty including parts and labour irrespective of mileage.

The factory reserves the right to make changes at any time, without notice, to prices, colours, materials, equipment, specifications and models and also to discontinue models.



**VOLVO**

RSP/PV 4225-77. Engelska/England